




# Firestone



## **TRANSFORCE™ HT**

### WORK DOESN'T HAVE TO BE UNCOMFORTABLE

#### FEATURES AND BENEFITS

-  All-season performance
-  Delivers solid traction in wet conditions and a quiet ride
-  Chip and tear resistance

#### HEAVY DUTY CONSTRUCTION

Built for popular applications to help prevent damage

#### NOISE REDUCTION TECHNOLOGY

Reduces noise on the road surface to help promote a quiet ride

#### CONTINUOUS SHOULDER RIBS

Help increase tread life



# Firestone

## TRANSFORCE™ HT

ENGINEERED FOR:



**TOP FITMENTS:** Dodge Ram 3500 / Chevrolet Silverado 2500  
Ford F-250 XL / Ford E-250

**TIRE TYPE:** All-Season

**SPEED RATING:** R, S & T

**SIZES:** 22 sizes from 15" to 18"


**WARRANTY:** Gold Pledge and Buy & Try,  
30-Day Guarantee



### TIRE SPECIFICATIONS

| Tire Size and Service Description | Load Range | Article Number | Sidewall Styling | Approved Rim Widths | Measuring Rim Width | Overall Tire Diameter | Overall Section Width | Tread Depth (32nd) | Minimum Dual Spacing | Revs Per Mile | UTQG | Wt. |
|-----------------------------------|------------|----------------|------------------|---------------------|---------------------|-----------------------|-----------------------|--------------------|----------------------|---------------|------|-----|
| <b>15" Rim Diameter</b>           |            |                |                  |                     |                     |                       |                       |                    |                      |               |      |     |
| LT235/75R15† 104/101R             | C          | 189837         | BW               | 6.0-7.0             | 6.5                 | 28.9                  | 9.3                   | 15                 | 10.8                 | 721           | -    | 32  |
| 205/65R15 102/100T                | C          | 002028         | BW               | 5.5-7.5             | 6.0                 | 25.5                  | 8.2                   |                    |                      | 817           | -    |     |
| <b>16" Rim Diameter</b>           |            |                |                  |                     |                     |                       |                       |                    |                      |               |      |     |
| LT215/85R16† 115/112R             | E          | 189701         | BW               | 5.5-7.0             | 6.0                 | 30.4                  | 8.5                   | 14                 | 9.9                  | 685           | -    | 37  |
| LT235/85R16† 120/116R             | E          | 189718         | BW               | 6.0-7.5             | 6.5                 | 31.7                  | 9.3                   | 14                 | 10.8                 | 657           | -    | 40  |
| LT225/75R16† 115/112R             | E          | 189752         | BW               | 6.0-7.0             | 6.0                 | 29.3                  | 8.8                   | 14                 | 10.2                 | 711           | -    | 35  |
| LT245/75R16† 120/116R             | E          | 189769         | BW               | 6.5-8.0             | 7.0                 | 30.5                  | 9.8                   | 14                 | 11.3                 | 683           | -    | 38  |
| LT265/75R16† 123/120R             | E          | 189786         | BW               | 7.0-8.0             | 7.5                 | 31.7                  | 10.5                  | 15                 | 12.2                 | 657           | -    | 44  |
| LT265/75R16† 123/120R             | E          | 207602         | OWL              | 7.0-8.0             | 7.5                 | 31.7                  | 10.5                  | 15                 | 12.2                 | 657           | -    | 44  |
| <b>16.5" Rim Diameter</b>         |            |                |                  |                     |                     |                       |                       |                    |                      |               |      |     |
| 8.75R16.5LT† 115/111R             | E          | 189803         | BW               | 6.0-6.75            | 6.8                 | 29.5                  | 8.8                   | 15                 | 9.9                  | 706           | -    | 35  |
| 9.50R16.5LT† 121/118R             | E          | 189820         | BW               | 6.75-8.25           | 6.8                 | 30.6                  | 9.5                   | 15                 | 10.7                 | 681           | -    | 40  |
| <b>17" Rim Diameter</b>           |            |                |                  |                     |                     |                       |                       |                    |                      |               |      |     |
| LT235/80R17† 120/116R             | E          | 191282         | BW               | 6.0-7.5             | 6.5                 | 31.8                  | 9.3                   | 14                 | 10.8                 | 655           | -    | 41  |
| LT225/75R17† 116/113R             | E          | 224133         | BW               | 6.0-7.5             | 6.0                 | 30.3                  | 8.8                   | 14                 | 10.2                 | 687           | -    | 37  |
| LT245/75R17† 121/118R             | E          | 207483         | OWL              | 6.5-7.5             | 7.0                 | 31.5                  | 9.8                   | 14                 | 11.3                 | 661           | -    | 42  |
| LT245/75R17† 121/118R             | E          | 225425         | BW               | 6.5-7.5             | 7.0                 | 31.5                  | 9.8                   | 12                 | 11.3                 | 661           | -    | 42  |
| LT245/75R17† 121/118R             | E          | 233007         | BW               | 6.5-7.5             | 7.0                 | 31.5                  | 9.8                   | 13                 | 11.3                 | 661           | -    | 42  |
| LT245/70R17† 119/116R             | E          | 191316         | BW               | 6.5-8.0             | 7.0                 | 30.6                  | 9.8                   | 14                 | 11.3                 | 681           | -    | 41  |
| LT245/70R17† 119/116R             | E          | 232990         | BW               | 6.5-8.0             | 7.0                 | 30.6                  | 9.8                   | 14                 | 11.3                 | 681           | -    | 41  |
| LT265/70R17† 121/118R             | E          | 200156         | OWL              | 7.0-8.5             | 8.0                 | 31.7                  | 10.7                  | 14                 | 12.4                 | 657           | -    | 46  |
| <b>18" Rim Diameter</b>           |            |                |                  |                     |                     |                       |                       |                    |                      |               |      |     |
| LT265/70R18 124/121R              | E          | 000011         | OWL              | 7.0-9.0             | 8.0                 | 32.6                  | 10.7                  | 15                 | 12.4                 | 638           | -    | 46  |
| LT275/70R18† 125/122R             | E          | 207500         | OWL              | 7.0-8.5             | 8.0                 | 33.2                  | 11.0                  | 15                 | 12.8                 | 627           | -    | 50  |
| LT275/70R18 125/122S              | E          | 250109         | BW               | 7.0-8.5             | 8.0                 | 33.2                  | 11.0                  | 15                 | 12.8                 | 608           | -    | 49  |
| LT275/65R18† 123/120S             | E          | 207619         | OWL              | 7.5-9.0             | 8.0                 | 32.1                  | 11.0                  | 17                 | 12.8                 | 649           | -    | 52  |

### PERFORMANCE CHARACTERISTICS

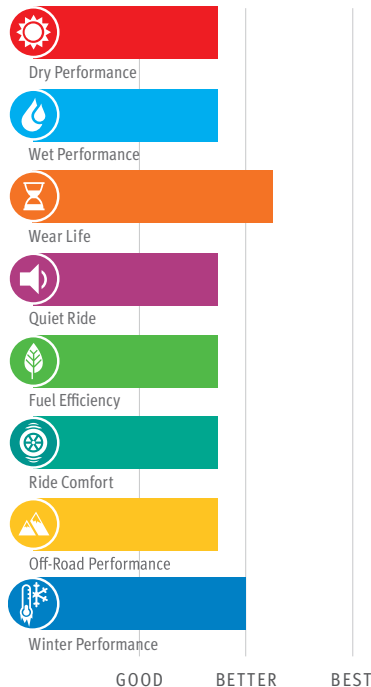

Designed as a general guideline to compare products within the Bridgestone and Firestone product portfolios. Based on the technologies featured in each tire and not on performance-testing data.